


# Hostile Environment Load Cell Cable


## Standard Features

- EL146HE—four-wire load cell cable
- EL147HE—six-wire load cell cable
- Designed for use in hostile environments
- Polyurethane jacketing provides superior chemical and abrasion resistance
- RFI and EMI protected with foil overbraid shield
- Unmatched durability, yet extremely flexible
- All conductors are industry-standard color coded
- Diameter—EL146HE: 7.1 mm; EL147HE: 8.1 mm
- The six-wire cable is best suited for longer runs where remote sense lines can be used
- Use the four-wire cable for repairing or extending existing cable
- Temperature rating: -30°C to 80°C
- 500 V rating

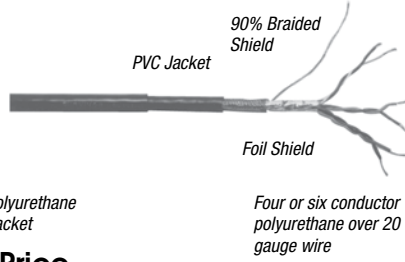

## Part Number/Price



Part #	Continuous Roll	Description	Price
15510	30,5 m	Four-conductor hostile environment cable	Consult
15511	76,2 m	Four-conductor hostile environment cable	Consult
15512	152,4 m	Four-conductor hostile environment cable	Consult
15513	304,8 m	Four-conductor hostile environment cable	Consult
15494	Custom Length	Four-conductor hostile environment cable	Consult
15520	30,5 m	Six-conductor hostile environment cable	Consult
15521	76,2 m	Six-conductor hostile environment cable	Consult
15522	152,4 m	Six-conductor hostile environment cable	Consult
15523	304,8 m	Six-conductor hostile environment cable	Consult
15496	Custom Length	Six-conductor hostile environment cable	Consult

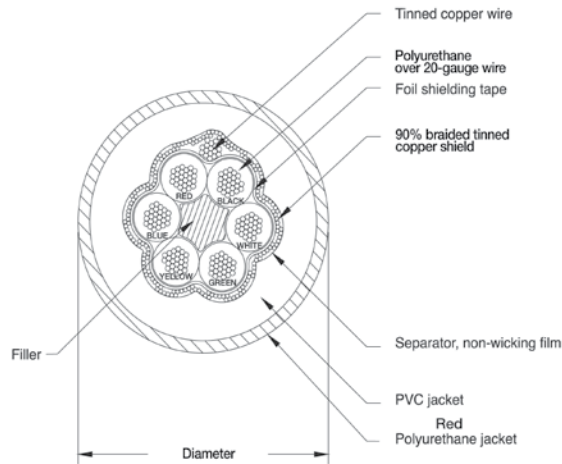

# Standard Load Cell Cable


## Standard Features

- EL146—four-wire load cell cable
- EL147—six-wire load cell cable
- 20 AWG tinned copper wire stranded for flexibility
- Braided shielding is encased in red PVC
- All conductors are industry-standard color coded
- Diameter—EL146: 6.4 mm; EL147: 7.4 mm
- The six-wire cable is best suited for longer runs where remote sense lines can be used
- Use the four-wire cable for repairing or extending existing cable
- Temperature rating: -30°C to 80°C



## Part Number/Price

Part #	Continuous Roll	Description	Price
15505	30,5 m	Four-conductor cable	Consult
15506	76,2 m	Four-conductor cable	Consult
15507	152,4 m	Four-conductor cable	Consult
15508	304,8 m	Four-conductor cable	Consult
15493	Custom Length	Four-conductor cable	Consult
15515	30,5 m	Six-conductor cable	Consult
15516	76,2 m	Six-conductor cable	Consult
15517	152,4 m	Six-conductor cable	Consult
15518	304,8 m	Six-conductor cable	Consult
15495	Custom Length	Six-conductor cable	Consult

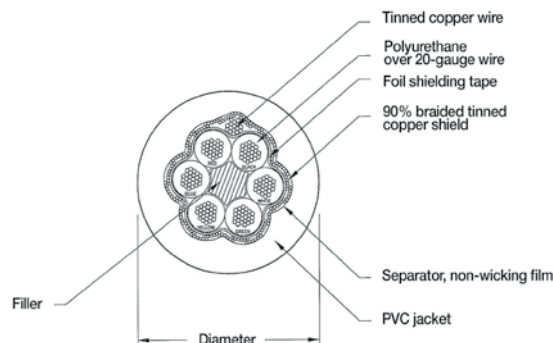

## APPROVALS

