



SINGLE-POINT

RL4413/RL4423

Alloy Steel, Environmentally Sealed, C3/C4/C5/C6, IP67

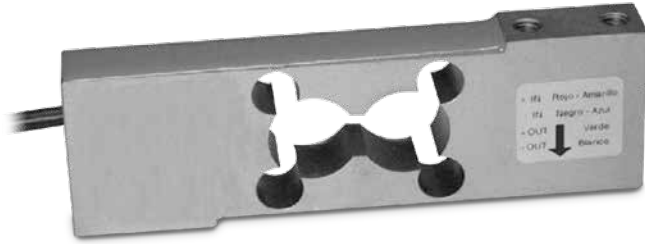

RL4413

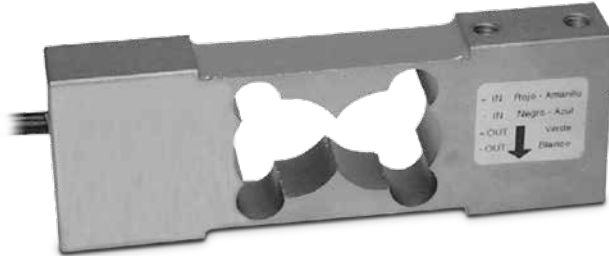

RL4423

Specifications

Full Scale Output:
2,0 mV/V

Output Resistance:
350 ohms ± 3

Input Resistance:
390 ohms ± 3

Material/Finish:
Alloy steel

Temperature:
-20° C to 70° C

Seal Type:
Environmentally sealed, IP67

Rated Excitation:
5–15 VDC max.

Insulation Resistance:
> 5000 Megohms

Cable Length:
5 m

Cable Color Code:

- Red+ Excitation
- Black.....- Excitation
- Green+ Signal
- White- Signal
- Yellow+ Sense
- Blue- Sense

Warranty:
One-year limited warranty

Approvals:
Complies with
OIML R60 C3/
C4/C5/C6



Order Information

Picture is a representation of actual product

Load Rating	Part #	Price
RL4413 Models		
5 kg	173352	Consult
7 kg	173355	Consult
10 kg	173356	Consult
20 kg	173357	Consult
40 kg	173358	Consult
RL4423 Models		
10 kg	173364	Consult
18 kg	173365	Consult
36 kg	173366	Consult

Dimensions

Nominal Capacity	A	B	C	D	E	F	G	H	I
mm (RL4413 model)									
5 - 40 kg	125	75	31	16	15	40	19	15	6
mm (RL4423 model)									
10 - 36 kg	115	65	31	16	15	40	19	-	6

