

**Specifications**


- Full Scale Output:**  
2,0mV/V
- Output Resistance:**  
350 ohms ± 3
- Input Resistance:**  
390 ohms ± 3
- Material/Finish:**  
Stainless steel
- Temperature:**  
-30°C to 70°C
- Seal Type:**  
Environmentally sealed, IP67  
IP68 rating with fully welded seal is available
- Rated Excitation:**  
5–15 VDC
- Insulation Resistance:**  
> 5000 Megohms
- Cable Length:**  
5 m

- Cable Color Code:**
- Red .....+ Excitation
  - Black.....- Excitation
  - Green .....+ Signal
  - White .....- Signal
  - Yellow .....+ Sense
  - Blue .....- Sense

**Warranty:**  
One-year limited warranty

**Approvals:**

Complies with  
OIML R60 C3/C4

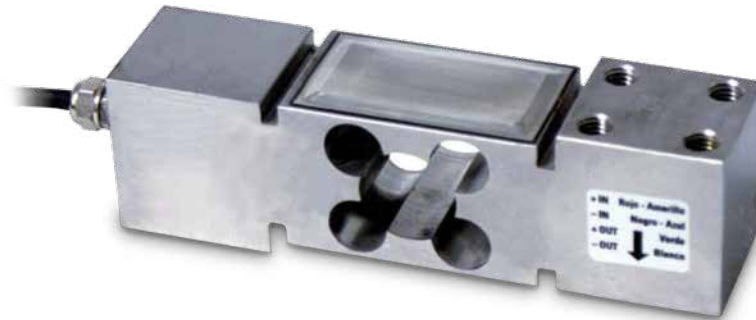

**Order Information**

*Picture is a representation of actual product*

Load Rating	Part#	Price
50 kg	173385	Consult
75 kg	173386	Consult
100 kg	173387	Consult
150 kg	173388	Consult
200 kg	173389	Consult
250 kg	173390	Consult
300 kg	173391	Consult
500 kg	173392	Consult

**Dimensions**

Nominal Capacity	A	B	C	D	E	F	G	H	I	J
mm										
50 - 500 kg	145	83	45	35	38	24	7	20	2	21

