

RL74

Stainless Steel, Hermetically Sealed, OIML C1/C4, IP68/IP69K



Specifications

- Full Scale Output:**
2,0 mV/V
- Output Resistance:**
705 ohms, ± 5
- Input Resistance:**
800 ohms, ± 5
- Material Finish:**
Stainless steel
- Temperature:**
-10° C to 40° C
- Seal Type:**
Hermetically sealed, IP68/IP69K
- Safe Overload:**
150%
- Rated Excitation:**
10V
- Combined Error:**
<± 0,013%
- Insulation Resistance:**
>5.000 megohms
- Cable Length:**
18 m
- Cable Construction:**
PVC
- Cable Color Code:**
Green+ Excitation
Black.....- Excitation
Red+ Signal
White- Signal
Blue+ Sense
Yellow- Sense
- Warranty:**
One-year limited warranty

Order Information

Picture is a representation of actual product


Load Rating	Part#	Est. Weight	Price
*15t	160864	2,5 kg	Consult
*20t	160865	2,5 kg	Consult
*25t	160866	2,6 kg	Consult
*30t	160867	2,6 kg	Consult
*40t	160868	2,8 kg	Consult
*60t	160869	3,8 kg	Consult
**100t	161138	11 kg	Consult
**200t	161139	11 kg	Consult
**400t	161140	23 kg	Consult
**600t	161141	27 kg	Consult
Consult	Digital	15-60t	Consult
Options			
Consult	ATEX versions		Consult

*15t to 60t OIML approved at 4.000 divisions

**100t to 600t OIML approved at 1.000 divisions

Dimensions

Rated Capacity	B	C	D	E
mm				
15-20t	150	123	44	76
25t	150	123	44	76
30t	150	123	44	76
40t	150	123	44	76
60t	210	153	44	76
100t	260	208	64	104
200t	260	208	64	104
400t	260	208	109	140
600t	260	208	118	140

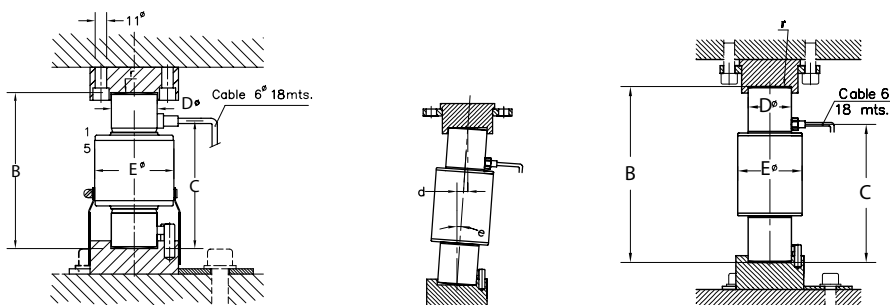

Approvals:
OIML Ex
R60 C1/C4 Optional

