

Specifications

Full Scale Output:
2,0mV/V

Output Resistance:
700 ohms, ± 3

Input Resistance:
800 ohms, ± 3

Material Finish:
Stainless steel

Temperature:
-10° C to 40° C

Seal Type:
Welded seal, IP69K

Safe Overload:
150%

Rated Excitation:
15V

Combined Error:
0,02%

Insulation Resistance:
>5.000 megohms


Cable Length:
15 m

Cable Construction:
PVC

Cable Color Code:
 Red+ Excitation
 Black- Excitation
 Green+ Signal
 White- Signal
 Yellow+ Sense
 Blue- Sense

Warranty:
One-year limited warranty

Approvals:
Complies with
OIML R60 C3/C4

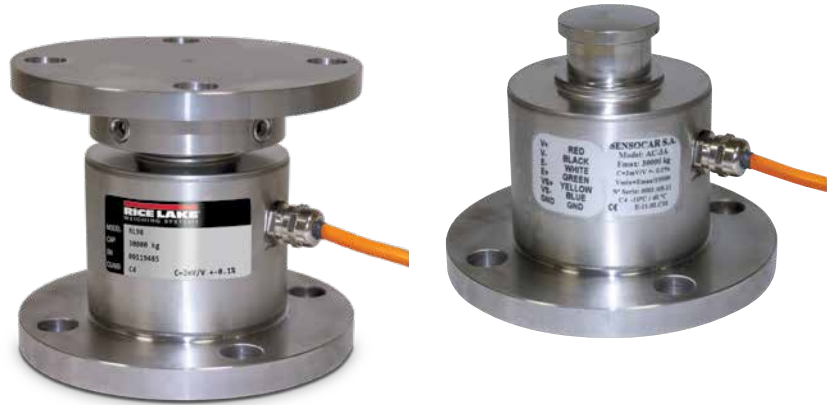

Order Information

Picture is a representation of actual product

Load Rating	Part #	Price
15t	161329	Consult
20t	161330	Consult
25t	161331	Consult
30t	161332	Consult
35t	161333	Consult
40t	161334	Consult
50t	161335	Consult
75t	161336	Consult
100t	161337	Consult
200t	161338	Consult

Dimensions

Rated Capacity	A	B	C	D	F	F	G
mm							
15 - 40t	250	215	32	277	150	.ø17	.ø17
50 - 200t	250	215	32	277	150	.ø17	.ø17

