

Fiber-Optic Cable

Standard Features

- Duplex cable polyethylene black jacket material
- 4,4 + 0,10 mm outer diameter of duplex cable
- 2,2 + 0,007 mm single cable outer diameter
- Operating temperature: 0°C to 70°C



Color Code: Black-TXD, Blue-RXD

Part Number/Price

Part #	Description	Price
78910	Custom length	Consult
78026	30,5 m cable	Consult
78027	60,96 m cable	Consult
78028	91,44 m cable	Consult
83052*	Fiber optic connector	Consult
80892	Fiber optic cable cutter	Consult
85548	Fiber optic hot knife	Consult

*Duplex fiber cable requires two connectors

*Maximum guaranteed transmission distance when used with the 320IS/10 module is 73,2 m

SURVIVOR® EL620HE High Temperature Cable

Standard Features

- Multi-conductor overall foil and braid shield
- Suitable for temperatures from -40°C to 200°C
- Insulation thickness 0,25 mm
- Jacket thickness 0,43 mm
- 18 gauge, tinned copper conductors
- Six-wire or six-conductor
- FEP jacket, resistant to chemical corrosion and high temperature
- Aluminum-polyester shield with 85% tinned copper braid shield
- 150 V NEC 725 Class 2 classified for use in an airplenum non-conduit
- 6,1 mm diameter cable




Part Number/Price

Part #	Description	Price
15605	EL620HE	Consult

SURVIVOR® Cable Armor

Standard Features

- Flexible all-metal protective armor
- Ideal for protecting load cell cable from mechanical abrasion or rodents
- Available in stainless steel and galvanized steel
- 12,7 mm internal diameter, 50,8 mm minimum bend radius
- Optional end fitting with 12,7 mm male pipe thread

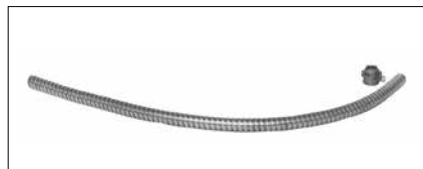

Part Number/Price

Part #	Description	Price
17808	Galvanized steel	Consult
17806	Stainless steel	Consult
17807	Optional end fitting	Consult