


T-Grip Molding

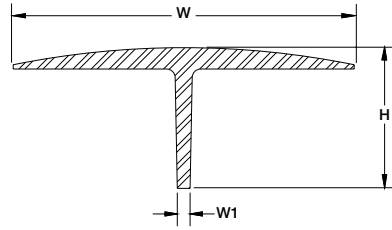

Standard Features


- Designed for use in truck scale applications to prevent spill-over into the pit
- Impact, tear, and weather-resistant EPDM rubber
- Barbed web to hold molding in place
- Web thickness 5,6 mm
- Available by the meter-3,1 m, 3,4 m, 21,34 m, 24,4 m and 30,5 m lengths.
- Maximum continuous length is 137 m

Part Number/Price

Part #	H	W	W1	Length	Price
18799	65,0 mm	146,1 mm	5,6 mm	Sold by the meter	Consult
18800	65,0 mm	146,1 mm	5,6 mm	3,05 m	Consult
18801	65,0 mm	146,1 mm	5,6 mm	3,35 m	Consult
18802	65,0 mm	146,1 mm	5,6 mm	21,34 m	Consult
33219	65,0 mm	146,1 mm	5,6 mm	24,4 m	Consult
33222	65,0 mm	146,1 mm	5,6 mm	30,5 m	Consult

Note: Maximum continuous length is 450 ft. Call for price and availability.

T-Strip Molding

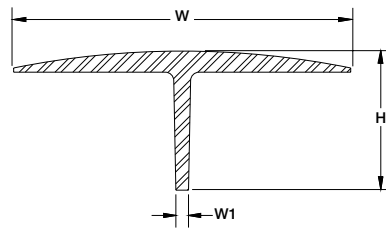

Standard Features

- Designed for use in truck scale applications to prevent spill-over into the pit
- Impact, tear, and weather-resistant SBR rubber
- Web thickness 6,4 mm
- Available by the meter-3,1 m, 3,4 m, 21,34 m, 24,4 m and 30,5 m lengths. Maximum continuous length is 137 m

Part Number/Price

Part #	H	W	W1	Length	Price
18736	50,8 mm	114,3 mm	6,4 mm	Sold by the meter	Consult
18776	50,8 mm	114,3 mm	6,4 mm	3,05 m	Consult
18797	50,8 mm	114,3 mm	6,4 mm	3,35 m	Consult
18798	50,8 mm	114,3 mm	6,4 mm	21,34 m	Consult
33223	50,8 mm	114,3 mm	6,4 mm	24,4 m	Consult
33224	50,8 mm	114,3 mm	6,4 mm	30,5 m	Consult

Note: Maximum continuous length is 137,2 m. Call for price and availability.